Monofacial Modules

Mono PERC High Density Module

DAS-WOBPH 360W ~ 370W

High Power

Module power leading in industry, up to 370W

High Reliability

15-year materials warranty,25-year power warranty

Excellent Appearance and Performance

Esthetic design, no flare effect

Low Hot-spot Risk

1/6 current, reducing the hot spot temperature

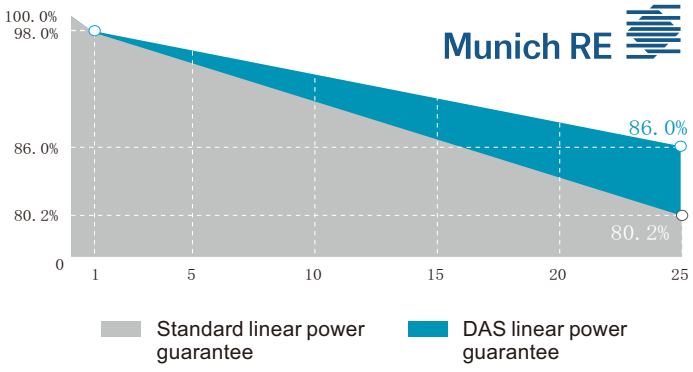

Product And Quality Certifications

- IEC 61215, IEC 61730
- ISO 9001:
  2015 Quality Management System
- ISO 14001:
  2015 Environmental Management System
- ISO 45001:
  2018 EHS Management System

-2.00%
First year power degradation

-0.50%
Annual degradation

15 YEAR
Materials and workmanship warranty

25 YEAR
Linear power warranty

DASOLAR®
Das Solar Co., Ltd.

DAS Solar Co., Ltd. was founded in 2018, as a new energy solution provider, headquarter located in Quzhou Green Industrial Park, Zhejiang Province, focusing on R&D and manufacture of high efficient cells, modules and PV system.

Electrical Parameters (STC*)

Module Type	DAS-WOBPH-370	DAS-WOBPH-365	DAS-WOBPH-360
Nominal Max. Power(Pmax/W)	370	365	360
Open Circuit Voltage(Voc/V)	47.47	47.41	47.35
Short Circuit Current(Isc/A)	9.90	9.79	9.68
Operating Voltage(Vmp/V)	39.54	39.47	39.40
Operating Current(Imp/A)	9.36	9.25	9.14
Module Efficiency(%)	20.0	19.8	19.5
STC*(Standard Test Condition): Irradiance 1000W/m², Cell Temperature 25°C, AM1.5			

Mechanical Parameters

Cell size	Mono PERC 158.75*26.46mm
Module size	1842×1008×35mm (L×W×H)
Glass Thickness	3.2mm
Module Weight	19.3Kg
Output Cable	4mm², cable length 300mm (can be customized)
Connector	1.QC4.10-cd ;2. PV-KST4-EVO2/xy_UR (male),PV-KBT4-EVO2/xy_UR(female); 3.PV-ZH202B;4.YC4;5.QC4.10-cds;6.PV-TT02;
J-Box	IP68, 2 bypass diodes
Frame	Anodized aluminium alloy

Temperature Coefficients

Short Circuit Current(Isc)	+0.048%/°C
Open Circuit Voltage(Voc)	-0.28%/°C
Nominal Max. Power(Pmax)	-0.35%/°C

Operating Parameters

Max. System Voltage	DC1500V
Power Selection	0~+5W
Power Tolerance	±3%
Open Circuit Voltage Tolerance	±2%
Short Circuit Current Tolerance	±4%
Operating Temperatue	-40°C ~ +85°C
Max. Fuse Rated Current	20A
Designed Mechanical Load	Positive 3600Pa, Negative 1600Pa
Safety Class	Class II
Packing Specification	31 pcs/Pallet, 186 pcs/ 20'GP; 744 pcs/ 40'HQ;

* Manufactured and assembled in China

Dimension

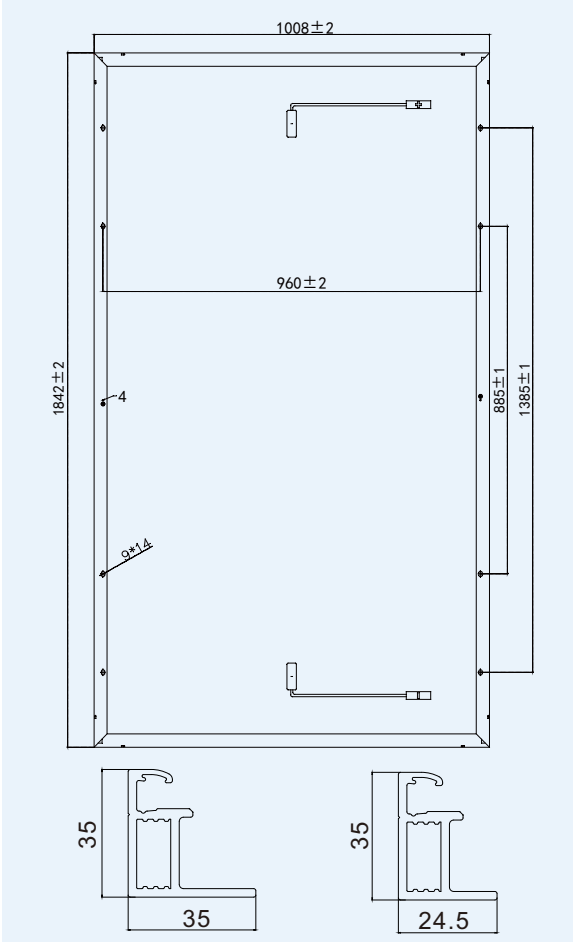

I-V curve

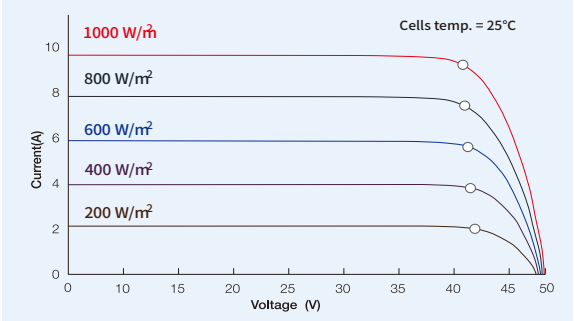

I-V curve

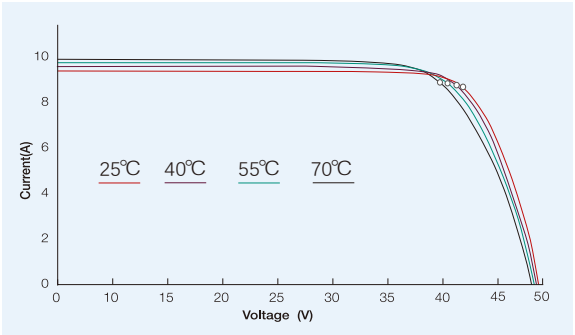

DASOLAR®
Das Solar Co., Ltd.

Headquarter: No.43, South Bailing Road, Green Industrial Cluster Zone, Quzhou, Zhejiang Province, China

Tel: +86 0510-80527063 **Web:**www.das-solar.com **Email:**info@das-solar.com